



Love Yourself

Neha Vasudevan

1.

IDEA & GOAL

- Travel
- Love Yourself
 - MoMA project
 - Archived
- Obsessed with color scheme
- Changed wallpaper
- Lemons?



1.

IDEA

&

GOAL

- Goal
 - Projects
 - A lil love
 - Bucket List
 - Community
 - Awareness



2. PROCESS

- Wireframes
 - <https://neha-vasu.github.io/overall/midtermUser/index.html>
- Ideas slightly impractical
- Stuff I ended up cutting out
 - Daily project
 - Search bar
 - Using more javascript
 - Bucket List depth
 - Self-care & challenges
 - Right margin
 - Drop-down menus
- Feedback from first prototype
- Lots of pivoting

2.

PROCESS

- Took notes
- Assets
- Research
 - Hover effects
 - Grid, flex
 - Image
 - Blog inspo



write
you are
beautiful you
are

over over over
over over over
over over over

when you
feel that
you're
awkward

when you're
disappointed
in yourself

when you
mess
up

parallax
scrolling

when you
hurt
someone

when someone
hurt you

when
you're
scared of
your
future

things to do

when you
think you
can't
see your
beauty

when you
failed at
something
you worked
hard on

when you
feel like
you're not
enough

LONDON:

top 5 things to do

NAME: PUBLIC OR PRIVATE
EMAIL:
message:

COMMENT:

the way
you expected

1 2 3 4 5 6 7 8 9 10
2
3
4
5

CSS-media query
CSS ids
Extensive comments
CODE CLEANUP
CITE SOURCES
PPT

THINGS TO DO:

→ search bar
→ GRID

→ TEXT BOX
affirm.

→ parallax
scrolling
on
words
page
→ Greg
feedback

→ right margin
affirmations

→ drop down menu

→ pos.
relative?

→ java animation

→ daily proj. section???

→ next & back buttons (art.html)

→ change para font?
KINDNESS

→ make a banner

→ raise money
for charity

→ marathon & charity

→ volunteer at a
shelter

ART SECTION:

→ paint a glass jar
for yourself or someone you
love and fill it with
pos. notes about them

→ play dough

→ go to a place you've
never been before and
take some pictures

→ told some paper cranes

WORDS

→ some of the most
empowering books

→ text/call someone
who you love but
have grown apart
from

→ things to say to yourself
in the mirror everyday

RANDOM


→ bake some chocolate
chip cookies

→ go on a road trip

→ face masks!

2. PROCESS

- Having a mid-life crisis every two seconds
- Biggest mid-life crisis
 - <https://galadarling.com/about-2/>

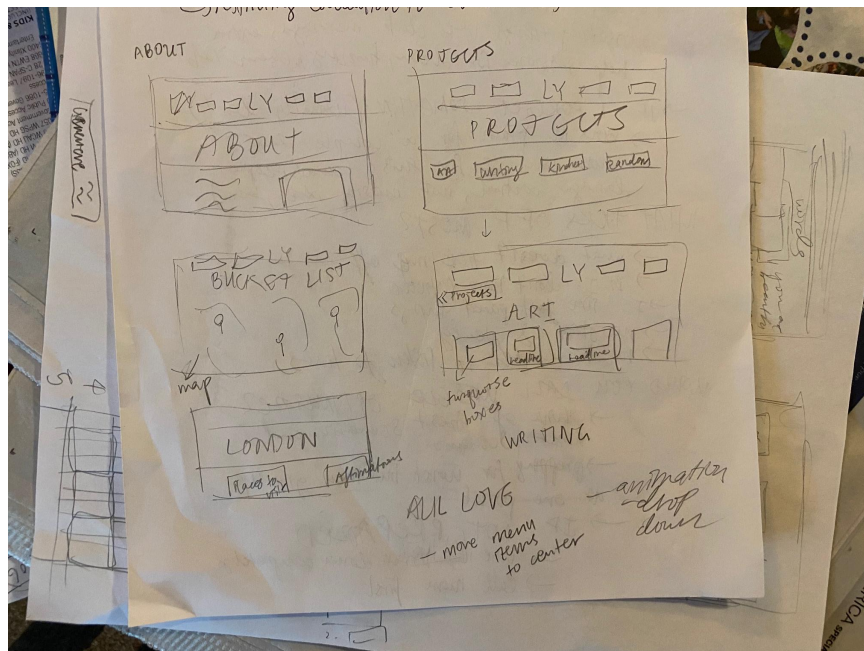

2.

PROCESS


- Feedback from brilliant humans
 - Gloria
 - Work on resizing
 - Greg
 - Padding
 - Text
 - Placement
 - colors



**“I’d say the only thing
I’d watch out for is
positioning”-
Gloria**

3. THINGS THAT WORKED

- Hopefully my concept?
- The sheer amount of time, and my soul that went into this
- This page makes me happy :)

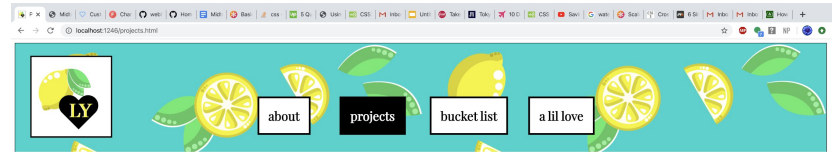

4.

**THINGS
THAT DID
NOT WORK**

- Honestly, everything at first
- Dropdown buttons

- » Accessibility
- » Agile
- » Algorithms
- » Android Development
- » Angular
- » AngularJS
- » Apache
- » ASP.NET
- » Bash
- » Blockchain
- » Books to Read for Programmers
- » Bootstrap
- » BSD operating system
- » C
- » Canvas
- » Certifications
- » Chef
- » Clojure
- » Cloud Development
- » Computational Genomics
- » Computer Hardware
- » Computer Science
- » Containers
- » C++
- » C#
- » Cascading Style Sheets (CSS)
- » D3
- » Data Science Tools
- » Design Patterns
- » Designer Tools
- » Developer Ethics
- » Developer Tools
- » DevOps

Option 2

The result is: Option 2

HTML:

In this section, we will discuss the implementation of the HTML code for the demo page. To start off, let's see the `<head>` code

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <meta http-equiv="X-UA-Compatible" content="ie=edge">
  <title>Dropdown Example</title>

  <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/-awesome/4.7.0/css/fo
  <link rel="stylesheet" href="styles.css">
</head>
```

This is basically HTML head boilerplate, with the exception of the `link` tags loading the two CSS stylesheets we will use in this tutorial: the Font Awesome styles, and the `styles.css` file, where we will define this page's styles.


Then, there's the rest of the HTML file, the body:

```
<body>
  <div class="dropdown">
    <div class="title pointerCursor">Select an option <i class="fa fa-angle-right"></i></div>

    <div class="menu pointerCursor hide">
      <div class="option" id="option1">Option 1</div>
      <div class="option" id="option2">Option 2</div>
      <div class="option" id="option3">Option 3</div>
      <div class="option" id="option4">Option 4</div>
    </div>

  </div>
  <span id="result">The result is: </span>
  <script>
    ...
  </script>
</body>
</html>
```

This section can be divided into 3 main parts:




4.


**THINGS
THAT DID
NOT WORK**

- Positioning

expectations:

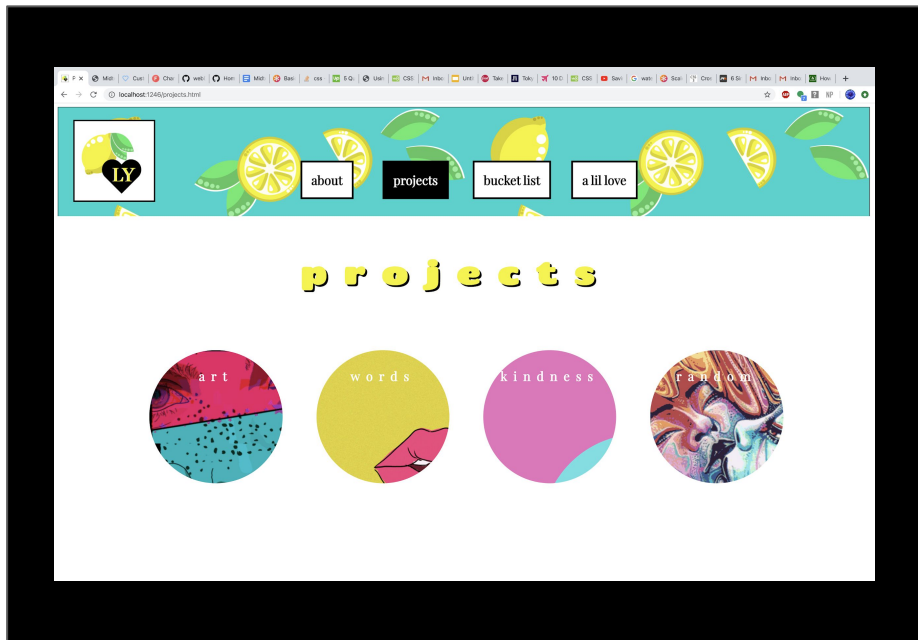

reality:

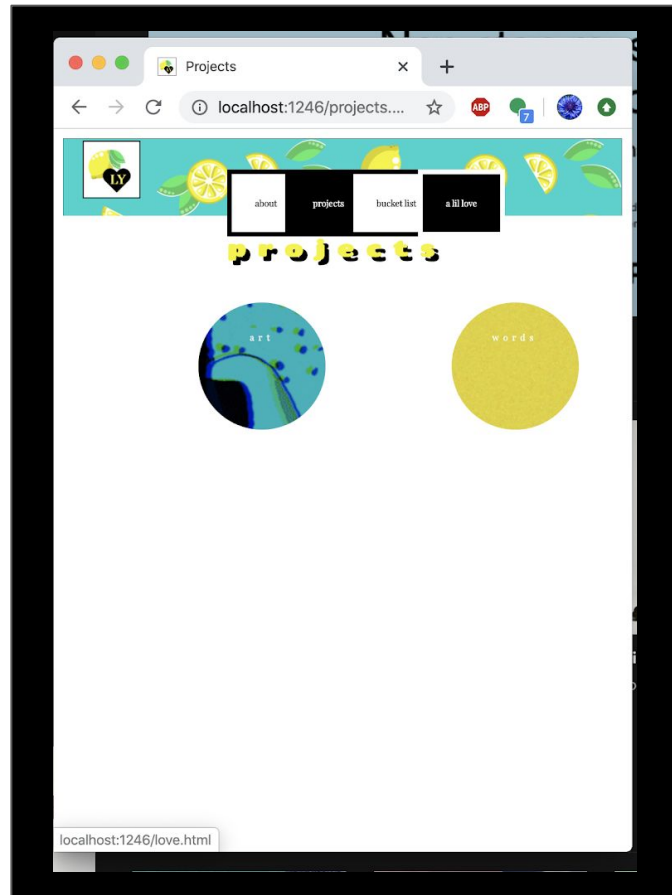

4.

THINGS THAT DID NOT WORK

- Javascript on “love yourself” subpage

Step 6: Defining the JavaScript Functions

For this final step, you'll need to define the `changeText()` and `defaultText()` functions which are being called by the `onmouseover` and `onmouseout` events. To do this, apply the following within the head tags of the HTML document.

```
01 <head>
02
03 <title>Change Text Hover Tutorial</title>
04
05 <link rel="stylesheet" type="text/css" href="style.css" />
06
07 <!-- JAVASCRIPT TO BE ADDED IN -->
08
09 <script type="text/javascript">
10
11     function changeText(text)
12     {
13         var display = document.getElementById('text-display');
14         display.innerHTML = "";
15         display.innerHTML = text;
16     }
17
18     function defaultText()
19     {
20         var display = document.getElementById('text-display');
21         display.innerHTML = "";
22         display.innerHTML = "What would you like to do?";
23     }
24
25 </script>
26
27 <!-- END JAVASCRIPT -->
28
29
30 </head>
```

You should notice a number of things. First is the method `document.getElementById`. All this does is to get (or access) the first element with the specified id so that it can be manipulated in some way. Notice it is used in both functions with the `innerHTML` property.

In the first function, the division is cleared and replaced with the description which was passed to it. This description is stored in a variable called `text` and used in the last line `display.innerHTML = text`.

The `defaultText` function is quite similar. Get the element, remove the HTML contents and replace it again with the original default text.



5.

TROUBLE SHOOT

- Reading the code over and over again
- Small fixes
- Research
- Greg the savior

Works Cited

Blog & Design Inspiration:

<https://firstsiteguide.com/examples-of-blogs/>

<https://css-tricks.com/snippets/css/complete-guide-grid/>

<https://diyinspired.com/>

<https://www.prettyhandygirl.com/>

<https://www.webdesignerdepot.com/2017/06/10-ways-to-design-menus-that-dont-suck/>

<http://www.ariastudio.com.hk/#>

<https://galadarling.com/about-2/>

<https://www.apartmenttherapy.com/life>

<https://medium.com/level-up-web/20-responsive-navigation-solutions-examples-codes-21644390afeb>

Javascript:

<https://guide.freecodecamp.org/javascript/tutorials/how-to-create-a-dropdown-menu-with-css-and-javascript/>

<https://www.mockplus.com/blog/post/search-bar-design>

Hover effects:

<http://css3.bradshawenterprises.com/cfimg/>

<http://www.new2html.com/tutorial/using-simple-javascript-change-text-hover/>

Works Cited

Help with Icons:

<https://www.iconsdb.com/black-icons/heart-69-icon.html>

CSS, Grid, Button:

https://www.w3schools.com/jsref/prop_text_value.asp

https://www.w3schools.com/howto/howto_css_custom_checkbox.asp

<https://alligator.io/css/css-grid-layout-fr-unit/>

<https://gridbyexample.com/examples/example1/>

https://www.w3schools.com/css/css3_mediaqueries_ex.asp

<https://stackoverflow.com/questions/6722467/how-to-remove-the-default-link-color-of-the-html-hyperlink-a-tag>

<https://www.fabriziovanmarciano.com/button-styles/>

Tokyo travel page:

<https://jw-webmagazine.com/2018-tokyo-bucket-list-20-top-things-to-do-f7f1b4372a90/>

<https://apassionandapassport.com/10-days-in-japan-a-first-timers-complete-itinerary/>